


# THREADED ROD LINEAR STEPPER 17HS3001-350TR8\*8

REV A

General specification		Electrical specification		Wiring diagram
Step angle	1.8° ± 5%	Rated voltage	2.3V	
Number of phase	2	Rated current	1.2A	
Insulation resistance	100MΩmin. (500V DC)	Resistance per phase	1.9Ω ± 10%	
Insulation class	Class B	Inductance per phase	4.5mH ± 10%	
Rotor inertia	57g·cm <sup>2</sup>	Holding torque	320mN·m	
Mass	0.3kg	Resolution	0.04mm	

17HS3001-350M

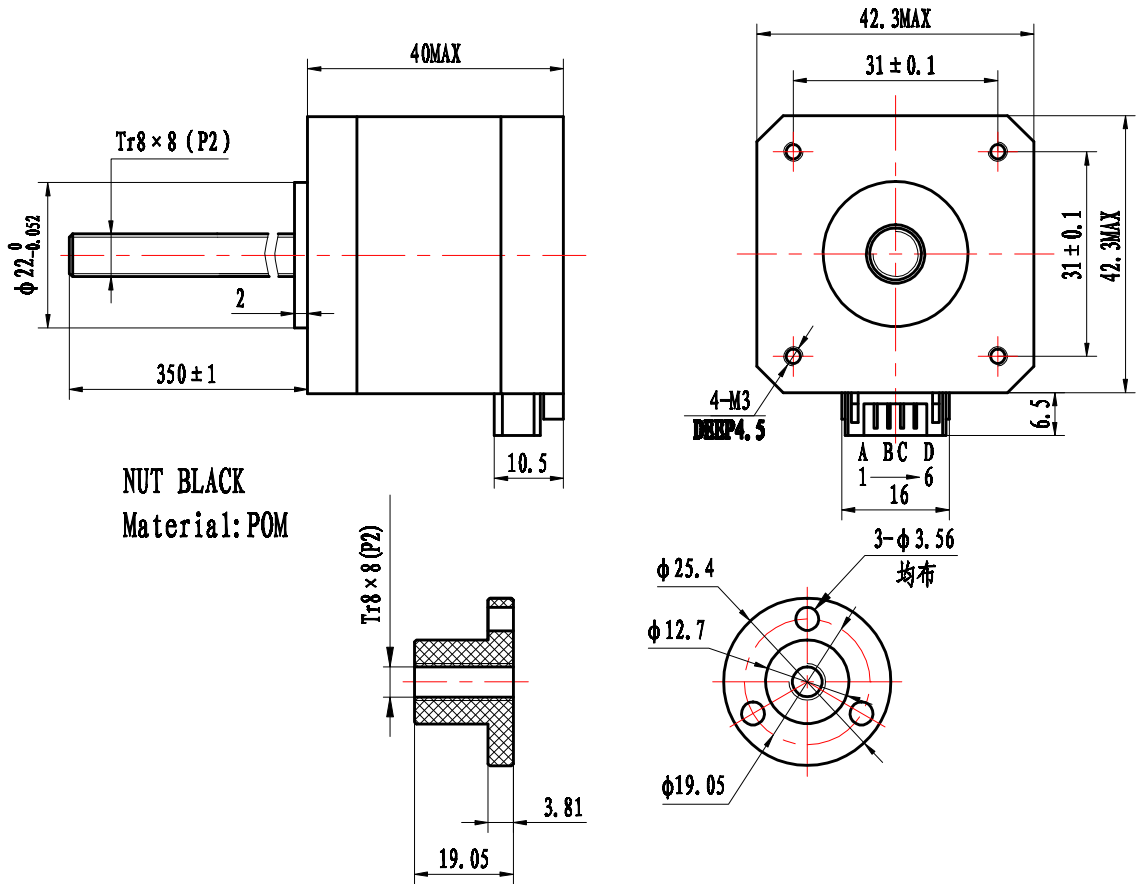

				ROBOTDIGG			
				17HS3001-350N			
标记	处数	更改文件号	签字	日期	图样标记	重量	比例
设计		标准化					
		批准					
审核							
工艺		日期	2014.05.05		共 1 张		第 1 张