



23HD
4405-C4X

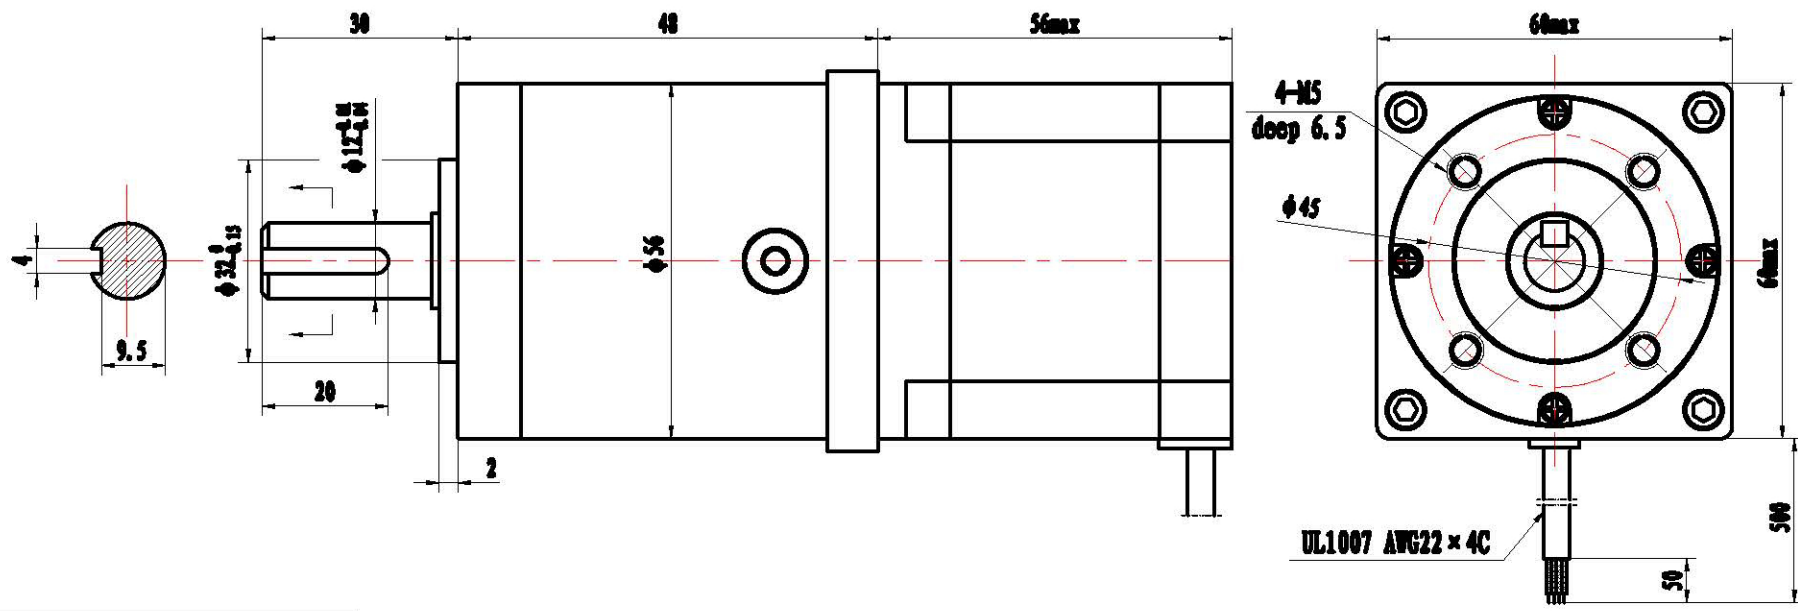

General & Electrical specification	
Step angle	1.8° ± 5%
Number of phase	2
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Rotor inertia	460g.cm ²
Mass	1.4kg
Rated voltage	1.6V
Rated current	4A
Resistance per phase	0.4Ω ± 10%
Inductance per phase	1mH ± 20%
Holding torque	650mL.m
Detent torque	45mL.m

Ball bearing gear head information	
Gear ratio	1 : 4.25

Wiring diagram		Revision				Approval		
	设计	更改文件号	签字	日期	同样标记	重量	比例	
	审核		标准					
	工艺		日期	2015.06.11	共 1 张	第 1 张		



ROBOTDIGG
Equip Makers

23HD4405-C4X型减速步进电机
规格书